


Ducted air conditioner

Nevo N26X ^[R14]



Unit features

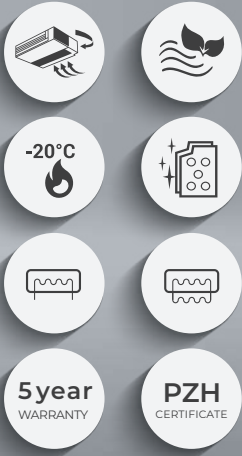

Digital DC Inverter SKY®



Electrostatic HD iAIR filter



Wide-angle eMOTO air supply



Air supply eMOTO control system



SMART wi-fi ⁽¹⁾



Wired controller SMART port



Wireless remote control ⁽¹⁾



Wired controller



SMART Follow mode



Autorestart memory



Anti-corrosive gold fins



Drip tray heater



Compressor crankcase heater



Silence mode



Timer



Cooling at low outdoor temp. down to -15°C



Heating at low outdoor temp. down to -20°C



Double-sided condensate drainage



Self-diagnostics



Sleep mode ⁽¹⁾



Integrated condensate pump



Fresh air supply ⁽¹⁾



ON/OFF remote output



Alarm output



Weekly controller output



Central controller output



Adjustable static pressure



Additional air supply



BMS Modbus ⁽¹⁾



BMS Bacnet ⁽¹⁾



Air inlet in the back / from down



Remote controller IrDA receiver

Technical specification

Model				Nevo 2,6 kW	
Capacity	Cooling	Nom. (Min. - Max.)	W	2638	
Rated input		Nom. (Min. - Max.)	W	-	
Operating current		Nom. (Min. - Max.)	A	-	
Capacity	Heating	Nom. (Min. - Max.)	W	2931	
Rated input		Nom. (Min. - Max.)	W	-	
Operating current		Nom. (Min. - Max.)	A	-	
Reversible heat pump type				air-to-air	
Design load in cooling mode			kW	-	
SEER			W/W	-	
Energy efficiency class, cooling				-	
Annual electric energy consumption, cooling			kWh/a	-	
Design load in heating mode (Tbiv -7°C)			kW	-	
SCOP			W/W	-	
Energy efficiency class, heating				-	
Annual electric energy consumption, heating			kWh/a	-	
Dehumidification			l/h	-	
Maximum energy consumption			W	-	
Maximum operating current			A	-	
Indoor unit				N26Xi R14	
EAN product code				5905567601880	
Fan speed	T / H / M / L		rpm	1080 / 920 / 790 / 650	
Air flow	T / H / M / L		m³/h	500 / 340 / 230 / 170	
Sound pressure level	T / H / M / L		dB(A)	40 / 34 / 27 / 24	
Sound power level			dB(A)	56	
Rated input			W	180	
Operating current			A	0,8	
ESP - External static pressure	Standard		Pa	25	
	Range		Pa	0 - 40	
Net dimensions	W × D × H		mm	700 × 450 × 200	
Gross dimensions	W × D × H		mm	860 × 540 × 275	
Net weight / Gross weight			kg	18 / 22	
Condensate drain			mm	25	
Outdoor unit				-	
EAN product code				-	
Fan speed	H / M / L		rpm	-	
Maximum air flow			m³/h	-	
Sound pressure level			dB(A)	-	
Sound power level			dB(A)	-	
Net dimensions	W × D × H		mm	-	
Gross dimensions	W × D × H		mm	-	
Bracket spacing	W × D		(mm)	-	
Net weight / Gross weight			kg	-	
Refrigerant	Type			-	
	GWP			-	
	≤ 5m		kg	-	
			TCO ₂ eq	-	
Charged (> 5m)		g/mb	-		
Pipe connections	Liquid/Gas		mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")	
Maximum installation length			m	-	
Maximum height difference			m	-	
Compressor type				-	
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f	
electrical protection			A	-	
Power cables: outdoor unit			pcs × mm²	Look data at HIRO	
Control and power cables: indoor unit - outdoor unit			pcs × mm²	4 × 1	
Indoor operating range (cooling / heating)			°C	16~32 / 0~30	
Outdoor operating range (cooling / heating)			°C	-	
Compatible systems					
1:1 SINGLE					
1:2 DUAL					
1:X MULTI				●	