

Wall-mounted air conditioner

Ukura U26X ^[R15]

S-LINE

HP-LINE

- 


SCOP
4,1
- 
- 

-20°C
- 
- 

4D
- 
- 

5 year
WARRANTY
- 



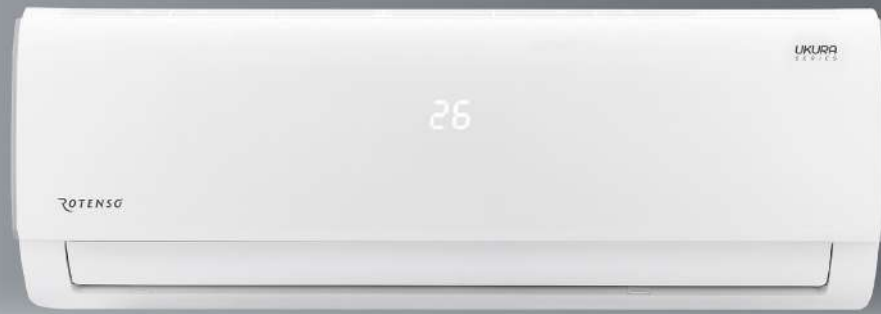


























PZH
CERTIFICATE



1:1
SINGLE

1:X
MULTI

Unit features

 <p>SKY inverter</p> <p>Digital DC Inverter SKY[®]</p>	 <p>Automatic purification iAIR ⁽¹⁾</p>	 <p>Super Ionizer iAIR</p>	 <p>Cold Nano iAIR filter</p>	 <p>Antibacterial HEPA iAIR filter</p>	 <p>Electrostatic HD iAIR filter</p>	 <p>Super Silent eMOTO mode ⁽¹⁾</p>	 <p>Automatic 4D louvres</p>
 <p>Turbo</p> <p>Turbo eMOTO mode ⁽¹⁾</p>	 <p>Air supply eMOTO control system</p>	 <p>Wide-angle eMOTO air supply</p>	 <p>SMART Wi-Fi</p>	 <p>Wired controller SMART port ⁽²⁾</p>	 <p>SMART panel display ON/OFF</p>	 <p>SMART Follow mode</p>	 <p>Wireless remote control</p>
 <p>OPTION</p> <p>Wired controller ⁽²⁾</p>	 <p>SMART heating to 8°C ⁽¹⁾</p>	 <p>Louvre setting memory</p>	 <p>1W standby mode ⁽¹⁾</p>	 <p>Auto restart memory</p>	 <p>Anti-corrosive gold fins</p>	 <p>Silence mode</p>	 <p>Timer</p>
 <p>-20°C</p> <p>Heating at low outdoor temp. down to -20°C</p>	 <p>-15°C</p> <p>Cooling at low outdoor temp. down to -15°C</p>	 <p>Double-sided condensate drainage</p>	 <p>Self-diagnostics</p>	 <p>Sleep mode</p>			

1


Technical specification

Model				Ukura 2,6 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (909-3400)
Rated input		Nom. (Min. - Max.)	W	800 (100-1240)
Operating current		Nom. (Min. - Max.)	A	3,5 (0,4-5,4)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (821-3370)
Rated input		Nom. (Min. - Max.)	W	930 (120-1200)
Operating current		Nom. (Min. - Max.)	A	4,0 (0,5-5,2)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	2,6
SEER			W/W	7,0
Energy efficiency class, cooling				A++
Annual electric energy consumption, cooling			kWh/a	130
Design load in heating mode (T _{biv} -7°C)			kW	2,3
SCOP			W/W	4,1
Energy efficiency class, heating				A+
Annual electric energy consumption, heating			kWh/a	788
Dehumidification			l/h	1
Maximum energy consumption			W	2150
Maximum operating current			A	9,3
Indoor unit				U26Xi R15
EAN product code				5905567606304
Fan speed	H / M / L / S		rpm	1100 / 900 / 750 / 590
Air flow	H / M / L / S		m ³ /h	435 / 389 / 333 / 259
Sound pressure level	H / M / L / S		dB(A)	37 / 32 / 25 / 21,5
Sound power level			dB(A)	53
Rated input			W	35
Operating current			A	0,2
Net dimensions		W × D × H	mm	715 × 194 × 285
Gross dimensions		W × D × H	mm	780 × 270 × 365
Net weight / Gross weight			kg	6,7 / 8,8
Condensate drain			mm	16
Outdoor unit				U26Xo R15
EAN product code				5905567606311
Fan speed	H / M / L		rpm	780 / 700 / 600
Maximum air flow			m ³ /h	1750
Sound pressure level			dB(A)	55
Sound power level			dB(A)	62
Net dimensions		W × D × H	mm	720 × 270 × 495
Gross dimensions		W × D × H	mm	835 × 300 × 540
Bracket spacing		W × D	(mm)	452 × 255
Net weight / Gross weight			kg	21 / 22,8
Refrigerant	Type			R32
	GWP			675
	≤ 5m	kg		0,47
		TCO ₂ eq		0,32
Charged (> 5m)		g/mb		12
Pipe connections		Liquid/Gas	mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")
Maximum installation length			m	25
Maximum height difference			m	10
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f
Electrical protection			A	C10
Power cables: outdoor unit			pcs × mm ²	3 × 1,5
Control and power cables: indoor unit - outdoor unit			pcs × mm ²	5 × 1,5
Control and power cables: hiro unit - indoor unit			pcs × mm ²	4 × 1,5
Indoor operating range (cooling / heating)			°C	17~32 / 0~30
Outdoor operating range (cooling / heating)			°C	-15~50 / -20~30
Compatible systems				
1:1 SINGLE				•
1:2 DUAL				
1:X MULTI S-Line				•
1:X MULTI N-Line				
1:X MULTI HP-Line				•

T - Turbo; H - High; M - Medium; L - Low; S - Silent;

Wall-mounted air conditioner

Ukura H U26Xi^[R15] / UH26Xo^[R15]

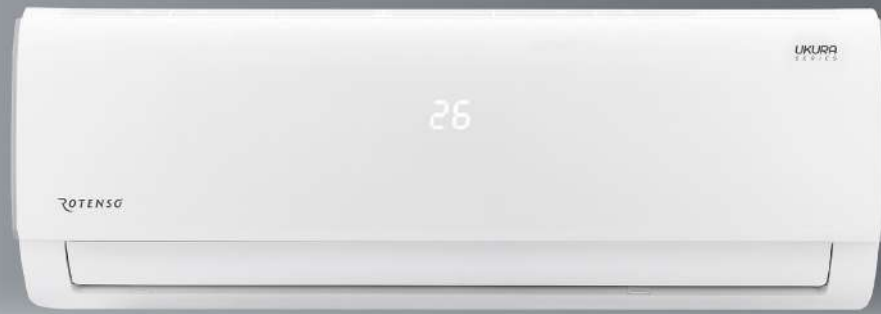

- SCOP 4,1
- Wi-Fi
- 20°C
- iAIR
- Coil
- Coil
- 5 year WARRANTY
- PZH CERTIFICATE

1:1
SINGLE

Unit features

SKY inverter Digital DC Inverter SKY®	Automatic purification iAIR ⁽¹⁾	Super Ionizer iAIR	Cold Nano iAIR filter	Antibacterial HEPA iAIR filter	Electrostatic HD iAIR filter	Super Silent eMOTO mode ⁽¹⁾	Automatic 4D louvres
Turbo Turbo eMOTO mode ⁽¹⁾	Air supply eMOTO control system	Wide-angle eMOTO air supply	SMART Wi-Fi	Wired controller SMART port ⁽²⁾	SMART panel display ON/OFF	SMART Follow mode	Wireless remote control
Wired controller ⁽²⁾	SMART heating to 8°C ⁽¹⁾	Louvre setting memory	1W standby mode ⁽¹⁾	Auto restart memory	Anti-corrosive gold fins	Drip tray heater	Compressor crankcase heater
Silence mode	Timer	Heating at low outdoor temp. down to -20°C	Cooling at low outdoor temp. down to -15°C	Double-sided condensate drainage	Self-diagnostics	Sleep mode	

1

Technical specification

Model				Ukura H 2,6 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (909-3400)
Rated input		Nom. (Min. - Max.)	W	800 (100-1240)
Operating current		Nom. (Min. - Max.)	A	3,5 (0,4-5,4)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (821-3370)
Rated input		Nom. (Min. - Max.)	W	930 (120-1200)
Operating current		Nom. (Min. - Max.)	A	4,0 (0,5-5,2)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	2,6
SEER			W/W	7,0
Energy efficiency class, cooling				A++
Annual electric energy consumption, cooling			kWh/a	130
Design load in heating mode (T _{biv} -7°C)			kW	2,3
SCOP			W/W	4,1
Energy efficiency class, heating				A+
Annual electric energy consumption, heating			kWh/a	788
Dehumidification			l/h	1
Maximum energy consumption			W	2150
Maximum operating current			A	9,3
Indoor unit				U26Xi R15
EAN product code				5905567606304
Fan speed	H / M / L / S		rpm	1100 / 900 / 750 / 590
Air flow	H / M / L / S		m ³ /h	435 / 389 / 333 / 259
Sound pressure level	H / M / L / S		dB(A)	37 / 32 / 25 / 21,5
Sound power level			dB(A)	53
Rated input			W	35
Operating current			A	0,2
Net dimensions		W × D × H	mm	715 × 194 × 285
Gross dimensions		W × D × H	mm	780 × 270 × 365
Net weight / Gross weight			kg	6,7 / 8,8
Condensate drain			mm	16
Outdoor unit				UH26Xo R15
EAN product code				5905567606328
Fan speed	H / M / L		rpm	780 / 700 / 600
Maximum air flow			m ³ /h	1750
Sound pressure level			dB(A)	55
Sound power level			dB(A)	62
Net dimensions		W × D × H	mm	720 × 270 × 495
Gross dimensions		W × D × H	mm	835 × 300 × 540
Bracket spacing		W × D	(mm)	452 × 255
Net weight / Gross weight			kg	21 / 22,8
Refrigerant	Type			R32
	GWP			675
	≤ 5m	kg		0,47
		TCO ₂ eq		0,32
Charged (> 5m)		g/mb		12
Pipe connections		Liquid/Gas	mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")
Maximum installation length			m	25
Maximum height difference			m	10
Compressor type				Rotary DC
Type of outdoor unit power supply			V-Hz, Ø	220-240-50, 1f
Electrical protection			A	C10
Power cables: outdoor unit			pcs × mm ²	3 × 1,5
Control and power cables: indoor unit - outdoor unit			pcs × mm ²	5 × 1,5
Control and power cables: hiro unit - indoor unit			pcs × mm ²	4 × 1,5
Indoor operating range (cooling / heating)			°C	17~32 / 0~30
Outdoor operating range (cooling / heating)			°C	-15~50 / -20~30
Compatible systems				
1:1 SINGLE				•
1:2 DUAL				
1:X MULTI S-Line				
1:X MULTI N-Line				
1:X MULTI HP-Line				

T - Turbo; H - High; M - Medium; L - Low; S - Silent;